




ChemMasters

*An American Owned and Operated
Specialty Construction Products Company*

Translucent Tint

for Staining Concrete

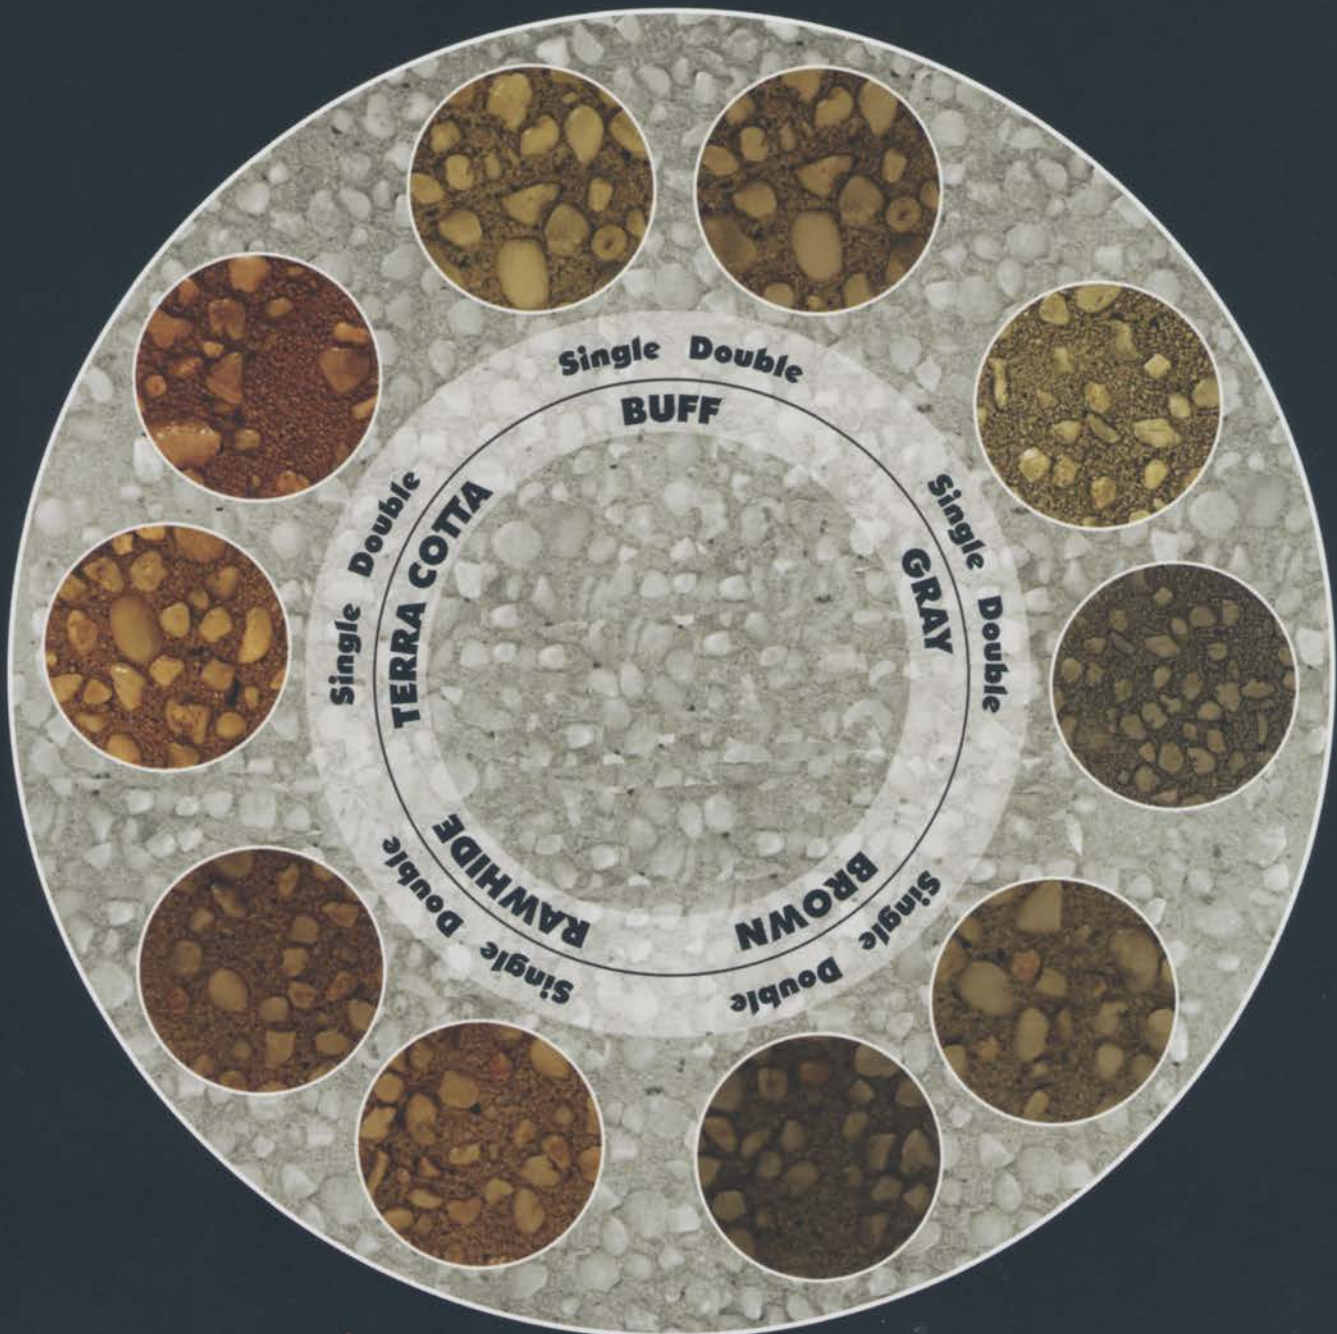

Standard Colors

Translucent Tint is available in 5 standard colors. Actual appearance may vary and is dependent on the color and porosity of the substrate. Special colors are available upon request.

Translucent Tint System

for Staining Concrete



Can be added to any ChemMasters solvent-based product.

Translucent Tint is concentrated tint that can be mixed with a clear, solvent-based sealer or cure & seal product to create a translucent stain for concrete and masonry.

Translucent Tint can be used with any ChemMasters' solvent-based acrylic product including our low VOC, acetone formulations.

A Translucent Tint treated ChemMasters sealer provides long-lasting protection from abrasion, UV exposure, staining, freeze-thaw damage, salts, and many other chemicals.

In addition, a Translucent Tint treated sealer enhances the beauty of all concrete especially exposed aggregate concrete.

Translucent Tint:

- Deepens the color and enhances the gloss of the concrete matrix
- Stains the matrix to provide a uniform, decorative appearance
- Highlights the natural color of stone
- Enables a wide range of decorative effects to be achieved
- Hides variations in the substrate color

The standard application rate for Translucent Tint is 1 quart (single) or 2 quarts (double) per 5-gallon pail of clear acrylic sealer. The dosage rate used depends on the decorative effect desired. Using a double dose of Translucent Tint per pail will darken and deepen the color more than a single dose (see color chart on reverse side).

Once determined, the same amount of Translucent Tint per pail should be used for the entire project. It is recommended that a 1-quart application be tested before adding a second quart.

Easy To Use - Pour 1 or 2 quarts of Translucent Tint into a 5-gallon pail of a clear, solvent-based, ChemMasters sealer or cure & seal and stir.

Translucent Tint mixes in quickly and easily. Apply the stain with a brush, roller or sprayer according to the directions on the 5-gallon pail.

Contact your local ChemMasters distributor or call **800-486-7866** for more information



300 Edwards Street • Madison, OH 44057
Phone 440-428-2105 • Fax 440-428-7091 • 800-486-7866
www.chemmasters.net